

LA36 is the actuator which has a slide block moving parallel along the housing of the spindle. It is suitable for electrical sofa recliners or chairs.

Feature :


- 24 V DC permanent magnet motor with thrust 1,000 N.
- Robust structure with easy installation and low noise.
- Duty cycle: Max. 10% or 2 min. of continuous usage followed by 18 min. of rest.
- Ambient temperature: +5°C to +40°C.
- Protection class: IP54.
- Color: Black.

The years of release : 2006

LA36 Ordering Example :

LA36. 9- 325 - 100 - T	
TYPE OF PLUG	T : 01 (T) plug (For CB04 and AD01 adaptor)
CABLE LENGTH	100: 100 cm 150: 150 cm 200: 200 cm 250: 250 cm
STROKE	325 : 325 mm 330 : 330 mm 333 : 333 mm
PITCH	9: (Push 1,000 N/Self-lock 1,000 N)
ACTUATOR TYPE	LA36-BASIC

Dimension:

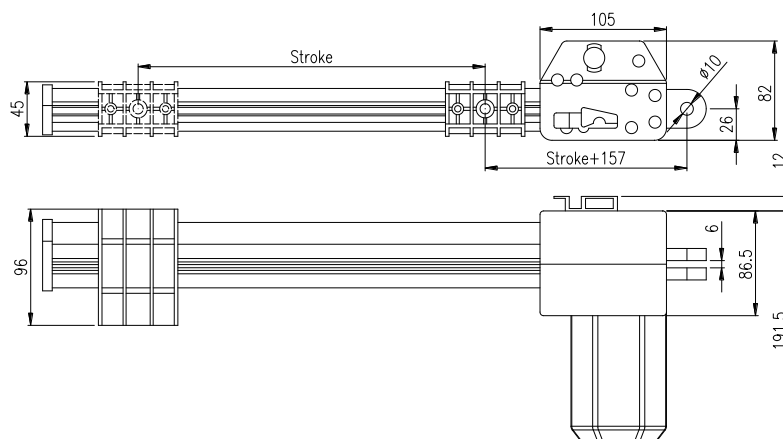

Specifications are subject to change without prior notice. It is the responsibility for the product users to determine the suitability of LINKAN A/C products for a specific application. LINKAN A/C will be responsible for replacing/ repairing defective products covered by the warranty if promptly returned to the factory. We won't undertake any responsibility except repairing.



LA36 Installation Dimension :

Actuator Stroke (mm)	325	330	333
Basic Installation Dimension (mm)	157		
Stretch Stroke (mm)	482	487	490

Data & Graph: (Duty Cycle: 10%)

Type	Max. load 【N】		Typical Current 【A】	Typical Speed 【mm/s】		Self Lock Max. 【N】
	Push	Pull	Full	Unload	Full Load	Push
LA36.9	1,000	1,000	3.5	30	18	1,000

※The data above is with DC 24 V power supply. For need of data with compatible LINKAN A/C control box, please contact LINKAN A/C R&D department.