



CB03 is an economic type control box with small size and can be mounted directly on LA29 as one set. It is suitable for beds and furniture with small installation space.

Feature :

- Connect up to 3 actuators. Actuators must be with 90 degree DIN plug.
- Can combine with HB3X and HB7X (with 90 degree 8-pin DIN plug).
- Elegant Design.
- Mains Voltage: 100-240 V AC ; 50-60 Hz (Electrical transformer).
- Output Voltage: DC 24 V.
- 1.8 m straight power cord .
- Duty cycle: Max. 10% or 2 min. of continuous use followed by 18 min of rest.
- Ambient Temperature: +5°C to +40°C.
- Can be mounted directly on LA29 actuator.
- Color: Grey white.
- Protection Class: IP51.



The years of release : 2010

CB03 Ordering Example :

CB03 . 3 S + 2EU

POWER CORD

2EU:2P, straight, EU plug
 2JP:2P, straight, JP plug ★
 2UL:2P, straight, UL plug
 2UK:2P, straight, UK plug★
 2IN:2P, straight, IN plug
 2AUS:2P, straight, AUS plug★

FIXATION S : fixed directly on the bedstead
 (blank): mounted with LA29


NO. OF CHANNEL (max. connecting actuator)

1 : 1-channel ★
 2 : 2-channel ★
 3 : 3-channel

CONTROL BOX TYPE CB03-STANDARD
 (Actuator on CB03 is with 90 degree DIN plug)

The 「★」 sign is for the special specification.

Dimension :

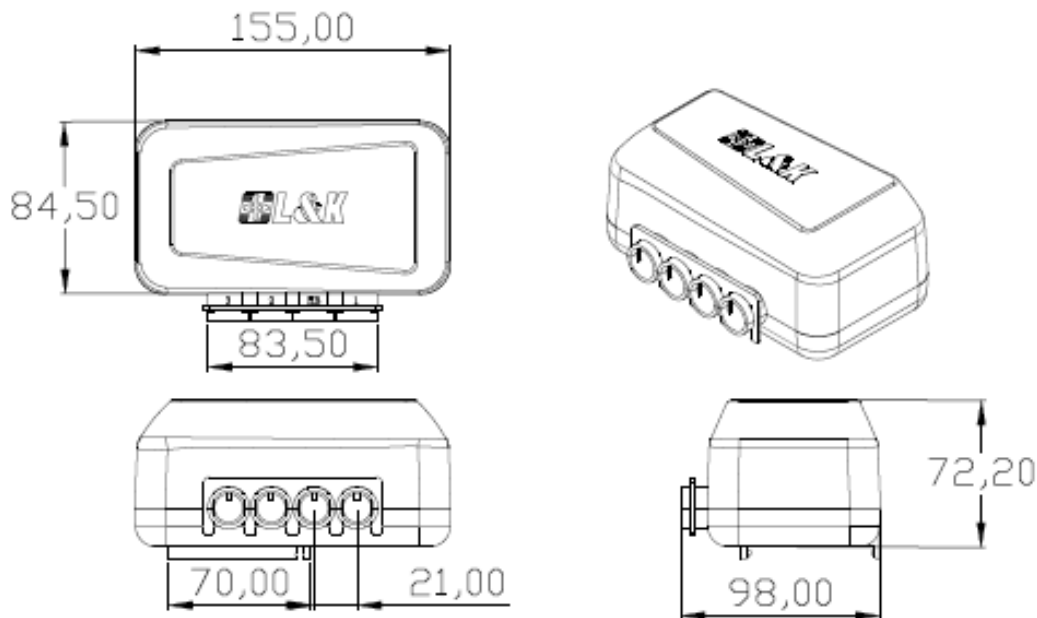

Notice :

- ◆ CB03 is compatible with HB3X and HB7X (with 90 degree, 8-pin DIN plug).
- ◆ Control up to 3 actuators.
- ◆ The actuators connecting on CB03 should be with 90 degree DIN plug.

Specifications are subject to change without prior notice. It is the responsibility for the product users to determine the suitability of LINKAN A/C products for a specific application. LINKAN A/C will be responsible for replacing/ repairing defective products covered by the warranty if promptly returned to the factory. We won't undertake any responsibility except repairing.