



LA30 is a dual actuator, with two motors run in 2 opposite movements. It is mainly applied on home adjustable beds.

Feature:

- Easy installation, strong structure with low noise and impact-tolerance.
- Main power voltage: AC 220-240 V 50 Hz; AC 100-120 V 60 Hz.
- Duty cycle: Max. 10% or 2 min. of continuous usage followed by 18 min. of rest.
- Ambient temperature: +5°C to +40°C.
- Standard protection level: IP20.
- Low consumption of electricity, high thrust 3,500N x2 <Max. thrust 5,000 N x2 >.
- Sliding safety lid.
- Color: Grey-white.

Option :

- Can combine with LA33 (Max. 2 pc) for High-low and Trendelenburg of bed.
- Can use one 9 V alkaline battery as emergency use when the main electricity is off (only work for lower-down).

The years of release : 2008

LA30 Ordering Example :

LA30. 0 - 87 - 64 - 2UL +22

Mains Voltage (Power voltage input) 12: 120 V 22: 230 V

Cables 2EU : 2P, straight, EU plug
2JP : 2P, straight, JP plug ★
2UL : 2P, straight, UL plug
2AUS : 2P, straight, AUS plug ★
2IN : 2P, straight, IN plug ★

Leg stroke (Start Point, Stroke)
48 : 0/48 mm 64 : 0/ 64 mm 69 : 0 / 69 mm

Back stroke (Start Point, Stroke)
74: 10 / 74 mm 78: 0/ 78 mm 87: 0/ 87 mm

Additional actuator (The additional actuator)
0 : No additional actuator
1 : 1 additional actuator (LA33) (with 01 plug)
2 : 2 additional actuators (LA33) (with 01plug)

Actuator type LA30


The 「★」 sign is for the special specification.

Specifications are subject to change without prior notice. It is the responsibility for the product users to determine the suitability of LINKAN A/C products for a specific application. LINKAN A/C will be responsible for replacing/ repairing defective products covered by the warranty if promptly returned to the factory. We won't undertake any responsibility except repairing.

Handset Actuator	HB23	HB33B	HB84B
LA30.0 (1 pc)	⊙		
LA30.1 (1 pc) and LA33 (1 pc)		⊙	
LA30.2 (1 pc) and LA33 (2 pc)			⊙

Dimension :

LA30

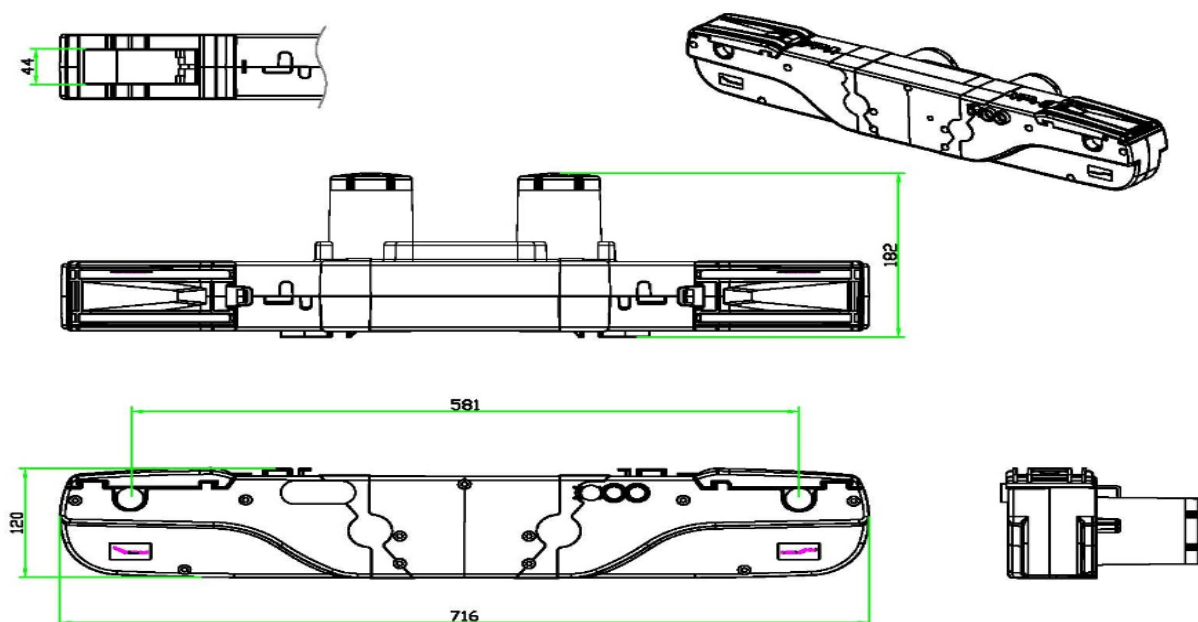

The lever

Specifications are subject to change without prior notice. It is the responsibility for the product users to determine the suitability of LINKAN A/C products for a specific application. LINKAN A/C will be responsible for replacing/ repairing defective products covered by the warranty if promptly returned to the factory. We won't undertake any responsibility except repairing.



- LINKAN ASIA CO.**
2021/10/01